


PREZZI - PRICES

ALTEZZA HEIGHT	BASE mm							
	100	200	300	400	500	600	700	800
mm	€	€	€	€	€	€	€	€
200								
300								
400								
500								
600								

TABELLA PRESTAZIONE - PERFORMANCE TABLE

Dimensioni - Sizes	Pressione - Pressure	Integrità - Integrity	Isolamento termico Thermal insulation
100 x 100 mm	-	E 120	I 120
400 x 400 mm	-	E 120	I 120
800 x 600 mm	-	E 60	I 60
100 x 100 mm	+	E 90	I 60
400 x 400 mm	+	E 120	I 60
800 x 600 mm	+	E 120	I 90

DIMENSIONI - DIMENSION

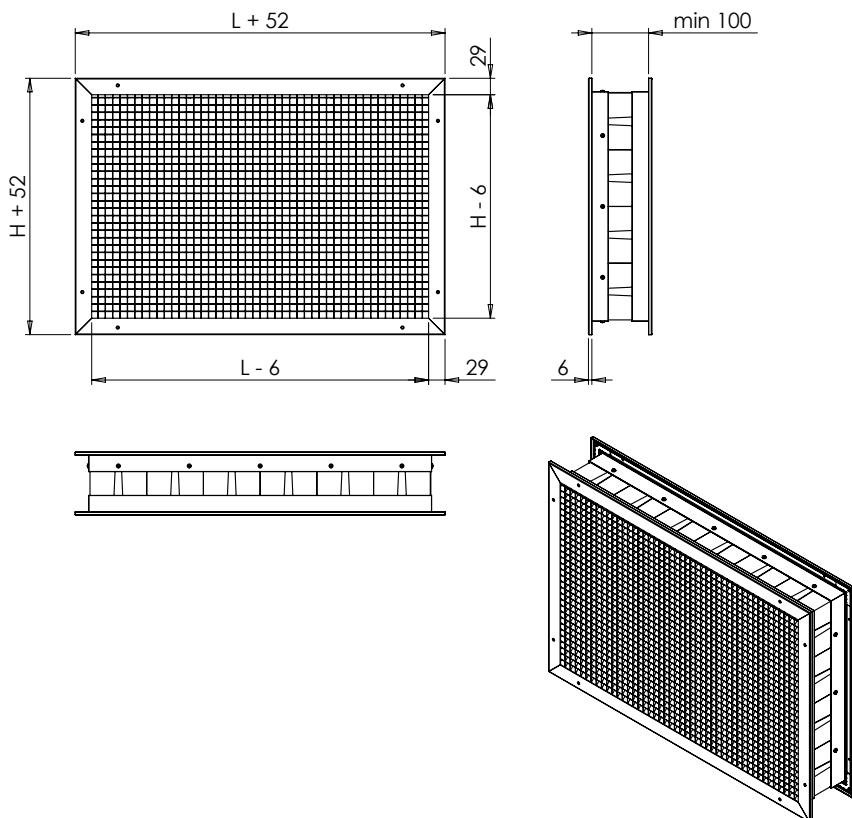

CARATTERISTICHE:

Griglia tagliafuoco adatta per installazione interna. Certificata secondo EN 1364-5:2017 e EN 1363-1:2012. Griglia ad ampia superficie di passaggio aria.

COSTRUZIONE:

Esecuzione con doppia griglia esterna a maglia quadra in alluminio con cornice ed elemento interno intumescente e termo-espandente.

SUPPORTO MINIMO DI INSTALLAZIONE:

Muratura in calcestruzzo aerato spessore 100 mm e densità 550 kg/mc.

CHARACTERISTICS:

Fire grille suitable for indoor installation. Certified according to EN 1364-5:2017 and EN 1363-1: 2012. Large free area for air passage.

CONSTRUCTION:

Execution with double egg crate external grille in aluminum with frame and internal element intumescent and thermo-expanding.

MINIMUM INSTALLATION SUPPORT:

Low density rigid wall made of aerated concrete of 100 mm thick and density of 550 kg/mc.